

Customizability equals flexibility, which equals freedom. With our customizable lighting control systems, you get the freedom to control your lighting system exactly the way you want. Use the RCS I as a remote preset recall station to allow multiple points of access throughout your facility, or use it as a main controller in a four-zone room. The freedom is at your fingertips.

Photos

Typical Applications



*RCS I with 8 presets, plus master on/off*



*RCS I with 4 presets, 4-zone raise/lower, and master on/off*



*RCS I with 4 presets, 2-zone raise/lower, and master on/off*



*RCS I with 4 presets, 1-zone raise/lower, and master on/off*

- Restaurants, lounges, clubs
- Houses of worship
- Offices, media rooms, conference rooms
- Auditoriums, meeting halls
- Ballrooms, multifunctional facilities, partitioned spaces
- Resorts, country clubs


Features

**RCS I (8-preset) Features**


- Remote preset recall station for RMS and RCS II master control stations
- Install in an office or entrance to quickly call up eight presets or turn all lights on or off
- Customizable faceplate with your choice of colors, graphics, or text

**RCS I (4-preset) Features**


- Recalls four presets, adjusts light levels for up to four zones, and turns all lights on or off
- Operates as a single-room controller or a master controller for small dimming systems
- Customizable faceplate with your choice of colors, graphics, or text

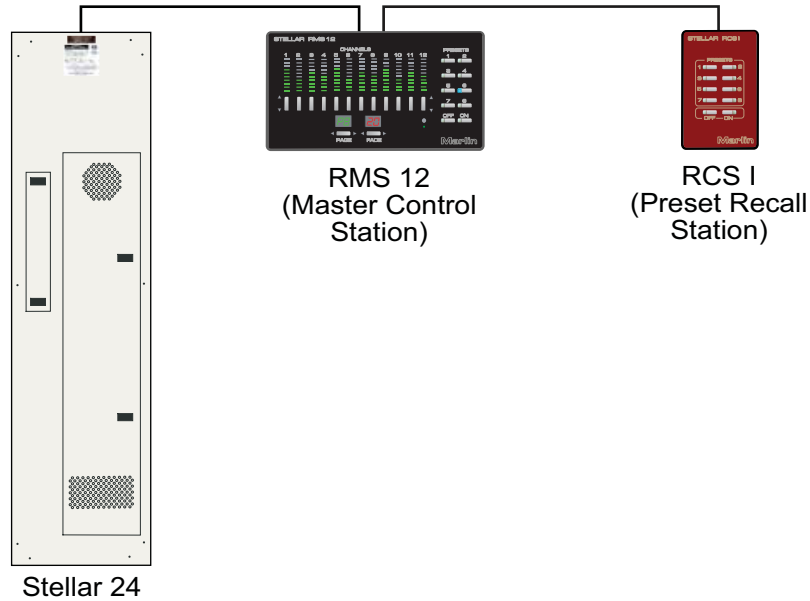


*Stellar dimmer panel with 24 dimmers, RMS 12 master control station, and RCS I eight-preset remote recall station*

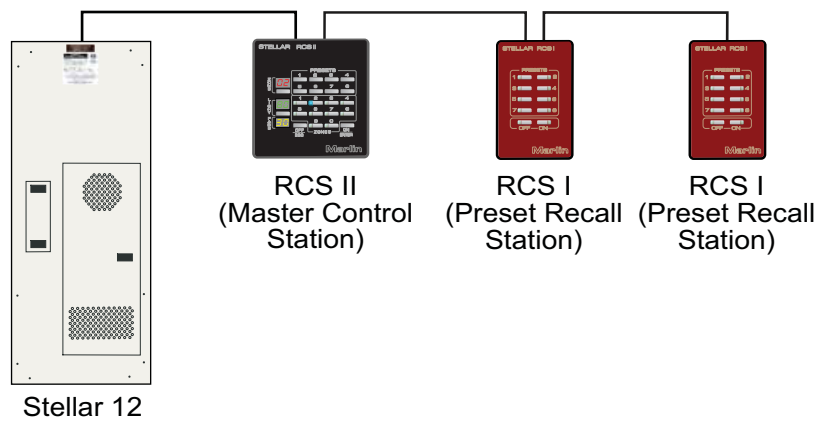

*Stellar dimmer panel with 12 dimmers, RCS II master control station, and two RCS I eight-preset remote recall stations*

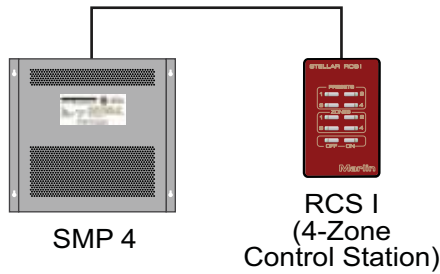

*Stellar Mini Panel with four dimmers and RCS I four-preset/four-zone control station*

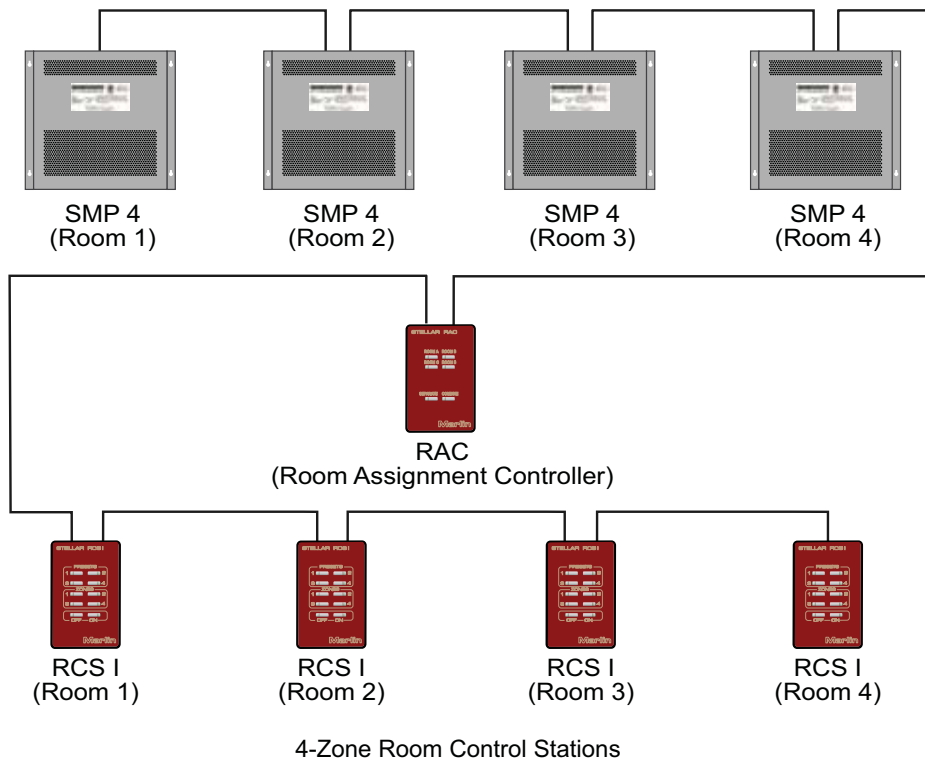

*Four Stellar Mini Panels for four partitioned spaces, with RAC room assignment controller, and four RCS I four-preset/four-zone room control stations*

Front dimensions	2.75" W x 4.50" H
Switch box dimensions	2.0" W x 3.75" H x 3.5" D (1-gang, Raco P/N 695)
Maximum number of controllers	Unlimited number of controllers per room
Presets	RCS I (8-preset): Eight, plus off an on presets, programmed at master control station RCS I (4-preset): Four programmable presets, plus off and on
Fade rate	RCS I (4-preset): 0, 20, 40, or 60 seconds
Raise/lower light level	RCS I (4-preset): Adjustable from 0% to 100% in 5% increments
Programming lock/unlock	Field-configurable; dip switch located at rear
External inputs	Four dry contact closure inputs (alarm system, door switch, motion sensor) Recalls preset when activated
Wiring	Requires four-conductor shielded low-voltage control cable, minimum 20-gauge (Belden #9402 recommended)
Input voltage	12 VDC
Communication	RS-485
Faceplate customization	Matte black, laser-engraved acrylic; custom colors, text, and graphics available upon request

\* Information within this document is subject to change without notice.

© Copyright 2007 Marlin Controls, Inc. All rights reserved.